



DESCRIPTION

| | |
|--------------------|-----------------|
| Type | Track Spotlight |
| Article-number | 141564L11694 |
| Colour | white |
| Energy Consumption | 33.1 W |
| Efficiency | 100 lm/W |
| Luminous Flux | 3305 lm |
| Current (sec) | 800 mA |
| Protection Class | IP 20 |
| Energy-Label | E |
| Cooling | Passive |

LED

| | |
|------------------------|---------------|
| Color Temperature | 2700K |
| Color Rendering | CRI 92 |
| LES | 15 |
| Color Tolerance | 3-Step McAdam |
| Planckian Curve | BBL |
| Spectrum | Warm White G7 |
| Photobiological safety | RG2 |

ELECTRICAL


| | |
|-------------------------------------|-----------------------|
| Overload- / Shortcircuit Protection | |
| Wiring / Adapter | 3-Phase Adapter |
| Max Luminaires MCB | B16A 27Stück |
| Tracks | Global Stucchi Eutrac |

Control

| | |
|---------|--------|
| Control | On/Off |
|---------|--------|

REFLECTOR

| | |
|------------|----------------|
| Technology | ULTRA |
| Material | Miro 20 Silver |
| FWHM | 66° |
| FWTM | 80° |

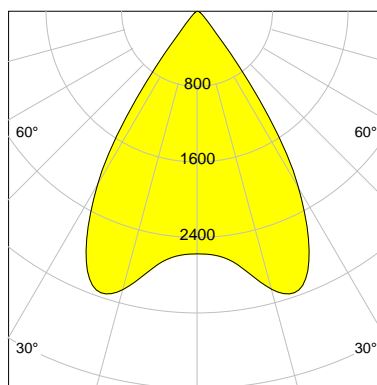

I-max : 3153 cd *

UGR : 22.7 (4H/8H - 70/50/20)

| H/m | D/m | E _{max} /lx/klm * |
|-----|-----|----------------------------|
| 1.0 | 1.3 | 778 |
| 2.0 | 2.6 | 194 |
| 3.0 | 3.9 | 86 |
| 4.0 | 5.2 | 49 |

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2022_10_19