

DESCRIPTION

Type	Track Spotlight
Article-number	141564L12017
Colour	white
Energy Consumption	33.1 W
Efficiency	72 lm/W
Luminous Flux	2383 lm
Current (sec)	800 mA
Protection Class	IP 20
Energy-Label	G
Cooling	Passive

LED

Color Temperature	2500K
Color Rendering	CRI 90
LES	15
Color Tolerance	3-Step McAdam
Planckian Curve	BBL
Spectrum	Bread G7
Photobiological safety	RG1

ELECTRICAL


Overload- / Shortcircuit Protection	
Wiring / Adapter	3-Phase Adapter
Max Luminaires MCB	B16A 27Stück
Tracks	Global Stucchi Eutrac

Control

Control	On/Off
---------	--------

REFLECTOR

Technology	ULTRA
Material	Miro 20 Silver
FWHM	66°
FWTM	80°

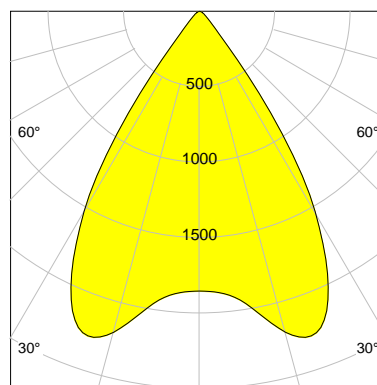

I-max : 2274 cd *

UGR : 21.6 (4H/8H - 70/50/20)

H/m	D/m	E _{max} /lx/klm *
1.0	1.3	778
2.0	2.6	194
3.0	3.9	86
4.0	5.2	49

Other configurations, accessories or controls like DALI or Wireless on request

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. Errors and omission excepted. Subject to change without prior notice. Last update 2022_10_19